




名称	EM11 40形 W120 屋白色 3,200lmタイプ 防水	
型番	EM11SD-B4N32BF9-A	
光源	型番	-
	全光束	- [lm] -
保守率 (40,000h)	良い	0.88
	普通	0.86
	悪い	0.81
効率	上半球	1.2 [%]
	下半球	98.8 [%]
	全方向	100.0 [%]
器具光束		3,070 [lm]

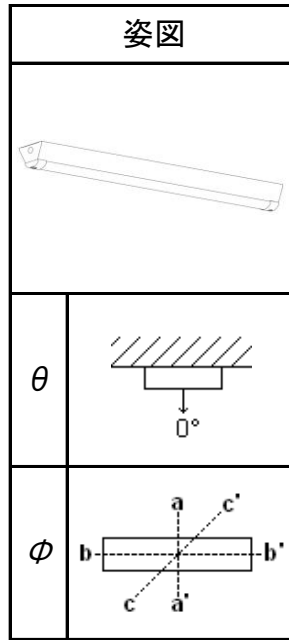


◎配光特性 [cd/1,000lm]

θ	ϕ	a-a'	b-b'	c-c'
0°		305	305	305
10°		299	298	298
20°		288	285	286
30°		268	260	263
40°		238	223	229
50°		201	176	188
60°		160	126	143
70°		119	79	99
80°		82	40	62
90°		52	12	34
100°		31	0	15
110°		18	0	0
120°		11	0	0
130°		0	0	0
140°		0	0	0
150°		0	0	0
160°		0	0	0
170°		0	0	0
180°		0	0	0


照明率表

反射率 (%)	天井		80						70						50				30		20	0		
	壁	床	70		50		30		70		50		30		50		30		30		10	0		
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																						初期値	
0.6	61	56	46	43	37	36	58	54	45	43	36	35	43	41	35	34	34	34	34	29	27			
0.8	71	65	56	53	46	44	69	63	55	52	46	44	52	50	44	43	43	42	42	37	35			
1	79	71	64	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	41	41			
1.25	87	77	73	67	63	59	83	75	71	66	62	58	67	63	59	57	57	55	50	48	48			
1.5	92	81	79	72	70	65	89	79	77	71	68	64	73	68	65	62	62	60	56	53	53			
2	100	87	89	79	80	73	96	85	86	78	78	72	81	75	74	70	71	68	64	61	61			
2.5	106	91	96	84	87	79	101	89	93	83	85	78	87	80	81	75	77	73	69	67	67			
3	109	94	100	88	93	83	105	92	97	86	90	82	91	83	85	79	81	77	73	71	71			
4	114	97	107	92	100	88	109	95	103	91	97	87	96	88	91	84	86	82	78	76	76			
5	117	99	111	95	105	91	112	97	107	93	102	90	99	90	95	87	89	85	82	79	79			
10	123	103	119	101	116	99	118	101	115	99	112	97	106	96	104	94	97	92	89	86	86			

配光曲線 (cd/1000[lm])

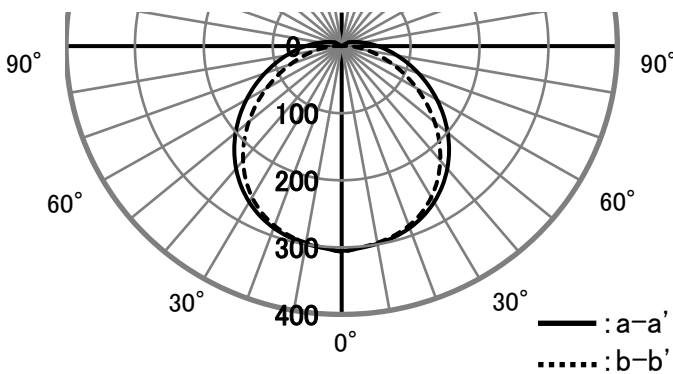

高さ(m) 直射水平面照度図 初期値

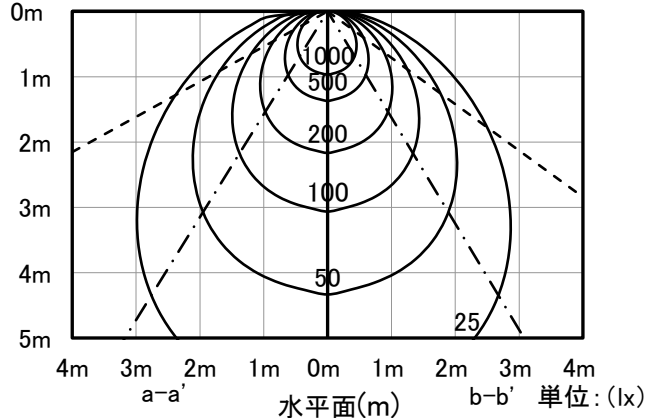

123°	1/2ビーム角---	109°
65°	1/2照度角---	63°