


名称	LEDダウンライト 埋込穴φ100 調光非対応 電球色	
型名	EA5D-24-100W-27R1	
光源	型名	-
	全光束	- [lm] -
保守率	良い	0.63
	普通	0.60
	悪い	0.53
効率	上半球	0 [%]
	下半球	100 [%]
	全方向	100 [%]
器具光束	350 [lm]	

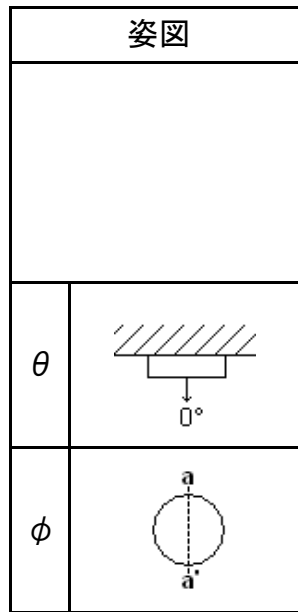


◎配光特性 [cd/1000lm]

θ	ϕ	a-a'	b-b'	c-c'
0°		817		
10°		726		
20°		520		
30°		340		
40°		226		
50°		151		
60°		97		
70°		57		
80°		20		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		


照明率表

反射率 (%)	天井						70						50				30		20	0	
	壁		70		50		30		70		50		30		50		30		30	10	0
室指数	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
0.6	72	67	60	57	52	50	71	66	59	56	51	50	57	55	51	50	50	49	45	45	44
0.8	82	75	69	65	61	59	80	73	68	65	61	58	66	63	60	58	58	57	53	53	51
1	90	81	77	72	69	66	87	79	76	71	68	65	74	70	67	64	65	64	60	60	58
1.25	97	86	85	78	77	72	94	84	84	77	76	72	80	76	74	71	72	70	66	66	64
1.5	102	89	91	82	83	77	99	88	89	82	82	77	85	80	79	75	77	74	71	69	69
2	109	95	100	89	93	84	105	93	97	88	91	84	93	86	88	83	85	81	78	77	77
2.5	113	98	106	93	99	89	110	96	103	92	97	89	98	90	93	87	90	86	83	81	81
3	116	100	110	96	104	93	113	99	107	95	102	92	101	93	97	90	93	89	87	85	85
4	120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	93	90	89	89
5	122	104	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91	91
10	127	106	125	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	98	96	96

配光曲線 (cd/1000[lm])

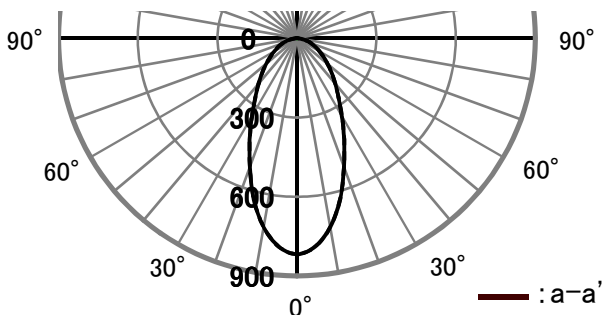

直射水平面照度図 初期値

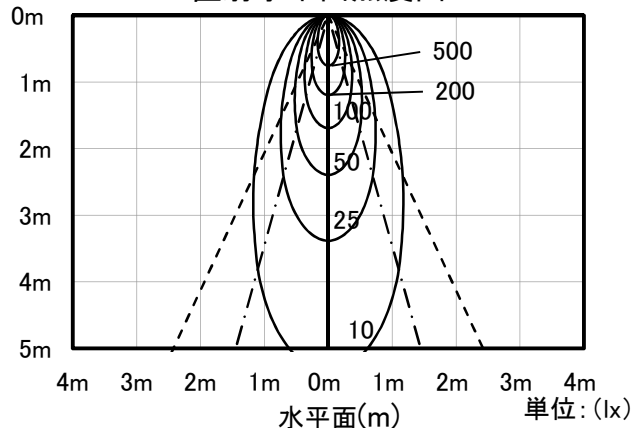

1/2ビーム角---	52°
1/2照度角 -.-	32°