


名称	LEDダウンライト 埋込穴φ150 調光対応 温白色	
型名	EM6D-150U-35R1	
光源	型名	-
	全光束	- [lm] -
保守率	良い	0.81
	普通	0.76
	悪い	0.71
効率	上半球	0 [%]
	下半球	100 [%]
	全方向	100 [%]
器具光束	790 [lm]	

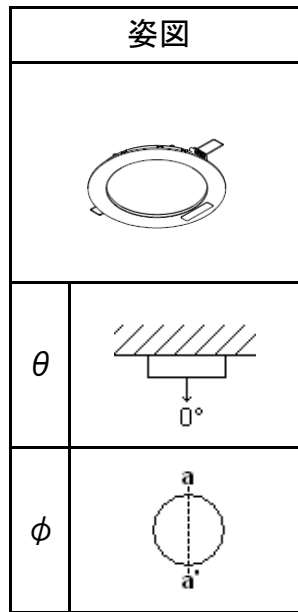


◎配光特性 [cd/1000lm]

θ	φ	a-a'	b-b'	c-c'
0°		767		
10°		729		
20°		606		
30°		395		
40°		218		
50°		122		
60°		78		
70°		46		
80°		19		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		


照明率表

反射率 (%)	天井						70						50				30		20		0				
	壁		70		50		30		70		50		30		50		30		30		10		0		
室指数	床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	
0.6	照明率 (×0.01)																							初期値	
0.8	76	70	64	61	56	55	74	69	63	60	56	54	62	59	55	54	55	54	55	54	50	49	57	56	
1	85	77	73	68	65	62	83	76	72	68	65	62	70	67	64	62	62	61	61	61	67	64	62	62	
1.25	92	83	81	75	73	69	90	82	79	74	72	69	77	73	71	68	69	67	67	67	70	68	68	68	
1.5	99	88	88	81	80	75	96	87	86	80	79	75	83	78	77	74	75	73	73	73	74	72	72	72	
2	104	91	94	85	86	80	101	90	91	84	85	79	88	82	82	78	80	77	77	77	74	72	72	72	
2.5	110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	84	84	81	79	79	79	
3	115	99	107	95	101	91	111	98	105	94	99	91	100	92	95	89	92	88	88	88	85	84	84	84	
4	118	101	111	97	106	94	114	100	108	96	104	94	103	94	99	92	95	91	91	91	89	87	87	87	
5	121	103	116	100	112	98	117	102	113	99	109	97	106	97	103	96	99	94	94	94	92	90	90	90	
10	123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	96	96	94	92	92	92	
	128	107	125	106	123	105	123	106	121	105	119	104	113	103	112	102	106	100	100	98	97	97	97	97	

配光曲線 (cd/1000[lm])

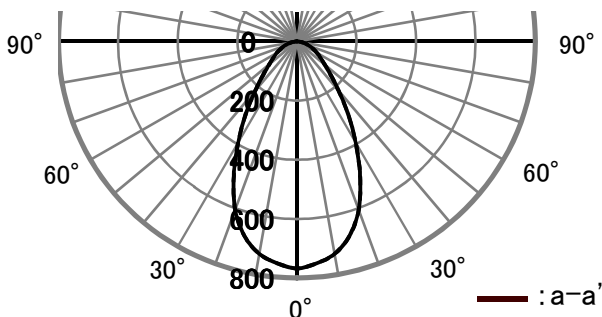

高さ(m) 直射水平面照度図 初期値

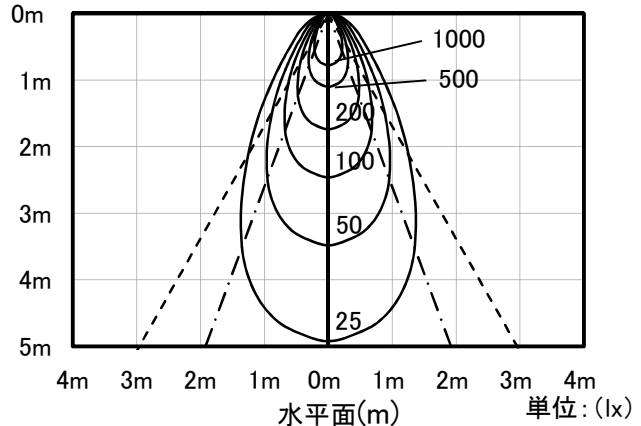

1/2ビーム角---	61°
1/2照度角 -.-	42°